



FRENUM HYDRAULIC PATCH





The New Speedy Hydraulic Hinge for Interior Applications

World first patch that can turn an already installed free swinging glass door to a fully controlled one by changing the bottom pivot and the bottom patch.

It is a true Speedy EN2 door closer, suitable for doors up to 100kg.

It has exactly the same dimensions and cut outs of the standard top and bottom patches (165mm x 50mm).

It can be used instead of a standard bottom patch for double acting doors. Can be used together to all other patch fittings (40000 series) in any of their finishes.

Easy to be installed, it takes less than 10 minutes like any standad free swinging glass door.

Adjustable bottom pivot and closing speed to suite any installation requirement.

Only one valve controls the closing speed.

As any of the Speedy floor springs it has the the Easy Opening and the Safety Valve functions.


Tested accordinding the EN1154 norms.



HEAD OFFICE 114 Endeavour Way, Sunshine West VIC 3020 Australia ADELAIDE OFFICE 7 Manfull Street, Melrose Park SA 5039 Australia












TECHNICAL DATA		
MAXIMUM DOOR WIDTH	Yellow Strength	90 cm
DOOR WEIGHT UP TO	100 kg	
WEIGHT OF THE PACKAGE	1,2 kg	

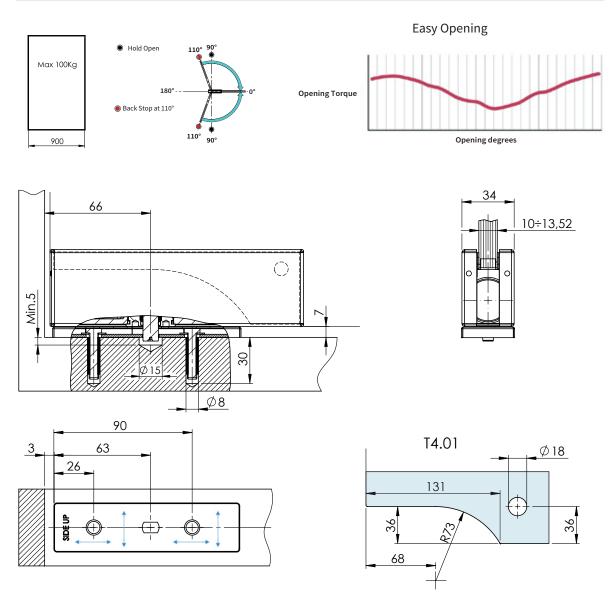


HEAD OFFICE 114 Endeavour Way, Sunshine West VIC 3020 Australia **ADELAIDE OFFICE** 7 Manfull Street, Melrose Park SA 5039 Australia

1300 4 ELITE

03 9314 6105

≥ sales@eliteglasssolutions.com.au







HEAD OFFICE 114 Endeavour Way, Sunshine West VIC 3020 Australia ADELAIDE OFFICE 7 Manfull Street, Melrose Park SA 5039 Australia

(1300 4 ELITE | 03 9314 6105

